

P600 Pressure Regulator

The BelGAS P600 series is a direct operated, pressure reducing regulator that can be used as a pressure loaded regulator, switching valve, or monitoring regulator. Available with a non-relieving option, an internal relief valve option or monitoring regulator option, the P600 is designed to maintain a constant, preset downstream pressure.

Applications

- Industrial and Commercial Gas Regulation
- Compressors
- Gas Engines



Materials of Construction

Adjusting Screw	Zinc
Body	Cast Iron
Bonnet	Cast Iron
Closing Cap	Acetal
Diaphragm	Nitrile
Housing	Cast Iron
Molded Seat Assembly	Nitrile / Aluminium
Upper/Lower Spring Seat	Plated Steel

P600 Series Maximum Inlet Pressures

Orifice size, Inches (mm)	Table 1: Maximum Operation Inlet Pressure, PSIG (bar)		
	With 1.2 PSIG (0.08 bar) or Less Outlet Pressure Setting	With 1.2 to 2.5 PSIG (0.08 to 0.17 bar) Outlet Pressure Setting	With 2.5 to 7 PSIG (0.17 to 0.48 bar) Outlet Pressure Setting
1/8 (3.17)	150 (10.3)	150 (10.3)	150 (10.3)
3/16 (4.76)	150 (10.3)	150 (10.3)	150 (10.3)
1/4 (6.35)	75 (5.17)	150 (10.3)	150 (10.3)
3/8 (9.53)	35 (2.41)	60 (4.14)	60 (4.14)
1/2 (12.7)	8 (0.55)	10 (0.69)	12 (0.83)
9/16 (14.3)	5 (0.34)	6 (0.41)	8 (0.55)

Specifications

Maximum Inlet	See Table 1
Maximum Emergency Outlet	10 PSIG
Pressure Ranges	See Table 2
Port Sizes	3/4 NPT 1 NPT
Orifice Sizes	1/8" 3/16" 1/4" 3/8" 1/2" 9/16"
End Connections	NPT
Temperature Range	-20°F to 180°F -29°C to 82°C
Approx. Weight	14 lbs. (6.4 kg)
Spring Case Vent Connection	1/4 NPT
Diaphragm Case (Control Line) Connection	1/2 NPT

P600 Series Range Springs

Table 2			
Spring Ranges		Spring Color	Part Number
WC or PSIG	BAR		
4 - 8" WC	.01 to .02	Red	655-732-000
7 - 16" WC	.017 to .04	Olive	655-732-001
15" WC to 1.2 PSIG	.037 to .08	Yellow	655-732-002
1.2 - 2.5 PSIG	.08 to .17	Light Green	655-732-003
2.5 - 4.5 PSIG	.17 to .31	Light Blue	655-732-004
4.5 - 7 PSIG	.31 to .48	Black	655-732-005

P600 Regulator Rebuild Kits

	Kit Includes	Part Number
O & M Version	Diaphragm, body O-ring, insert O-ring, seat assembly, cotter pin, seat stem O-ring, throat seal O-ring	971-600-000
R Version	Diaphragm, body O-ring, insert O-ring, seat assembly, cotter pin	971-600-001

P600 Part Matrix


P600								0	
	↑	↑	↑	↑	↑	↑	↑		Body
06									3/4 NPT
08									1 NPT
									Spring Range
008									4-8 WC
016									7-16 WC
001									15 WC - 1.2 PSIG
002									1.2 - 2.5 PSIG
004									2.5 - 4.5 PSIG
007									4.5 - 7 PSIG
									Options
0									None
M									Monitor Version
R									Relieving Version
									Vent Assembly
0									Up
1									Down
									Orifice
2									1/8"
3									3/16"
4									1/4"
6									3/8"
8									1/2"
9									9/16"
									Body Position
1									Up (Standard)
2									Down
3									Right
4									Left
									Bonnet Vent Orientation
C									12 O'Clock (Standard)
D									3 O'Clock
E									6 O'Clock
F									9 O'Clock
0									

P600 Internal Relief Discharge


Spring Range with Spring Case Upward	Internal Relief Start-to-Discharge. Pressure Above Set Pressure
4 to 8 inches WC (10 to 20 mbar)	10 to 24 inches WC (25 to 60 mbar)
7 to 16 inches WC (17 to 40 mbar)	10 to 26 inches WC (25 to 65 mbar)
15 inches WC to 1.2 PSIG (37 to 83 mbar)	10 to 26 inches WC (25 to 65 mbar)
1.2 to 2.5 PSIG (0.08 to 0.7 bar)	0.5 to 2 PSIG (0.034 to 0.14 bar)
2.5 to 4.5 PSIG (0.17 to 0.31 bar)	0.5 to 3 PSIG (0.034 to 0.21 bar)
4.5 to 7 PSIG (0.31 to 0.48 bar)	1 to 4 PSIG (0.069 to 0.28 bar)

(Actual outlet pressure maybe lower with spring case downward.)

P600 Body Positions

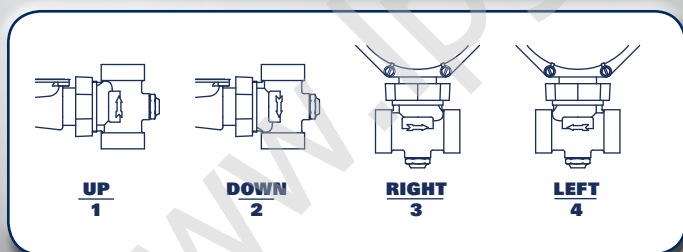


P600 Vent Positions

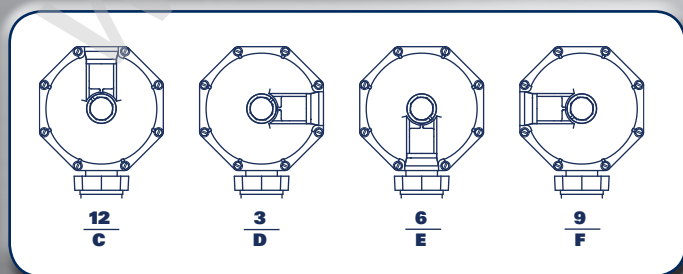

P600 Dimensions

Body Size	A	B	C
Inches NPT	Inches	Inches	Inches
3/4	4	6.25	10.7
1	4	6.25	10.7

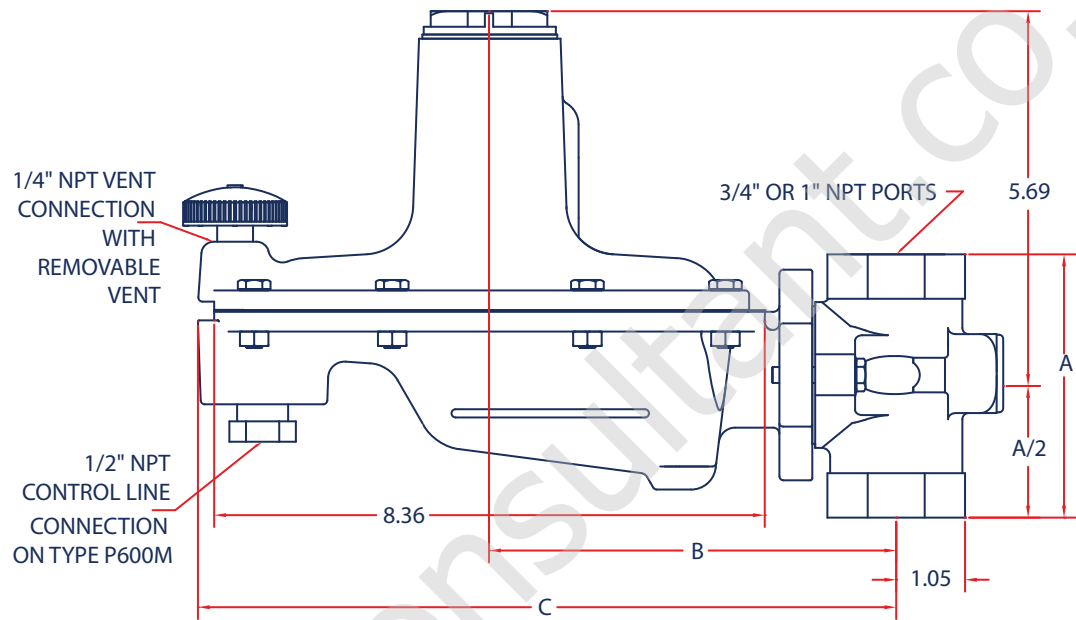

P600 Flow Capacities in SCFH (Nm³/h) of 0.6 Specific Gravity Natural Gas

Outlet Pressure Range	Offset from Setpoint	Outlet Pressure Setting	Inlet Pressure		NPT 3/4 Body Size					
					Orifice Size, Inches (mm)					
			PSIG	BAR	1/8 (3.2)	3/16 (4.8)	1/4 (6.4)	3/8 (9.5)	1/2 (12.7)	9/16 (14.3)
4 to 8 inches WC (10 to 20 mbar)	1 inch WC (2 mbar)	7 inches WC (17 mbar)	1	0.069	90 (2.42)	170 (4.50)	230 (6.61)	250 (6.57)	410 (11.0)	440 (11.8)
			5	0.34	220 (5.87)	280 (7.61)	450 (12.1)	490 (13.1)	520 (13.8)	970 (25.9)
			8	0.55	230 (6.22)	480 (12.8)	530 (14.2)	540 (14.5)	590 (15.9)	
			20	1.4	520 (13.8)	600 (16.2)	620 (16.6)	650 (17.3)		
			35	2.4	660 (17.6)	670 (18.0)	840 (22.5)	900 (24.2)		
			75	5.2	770 (20.7)	840 (22.5)	960 (25.6)			
			150	10.3	1680 (44.9)	2310 (61.9)				
7 to 16 inches WC (17 to 40 mbar)	1 inch WC (2 mbar)	11 inches WC (27 mbar)	1	0.069	90 (2.42)	130 (3.46)	160 (4.15)	190 (5.20)	230 (6.22)	250 (6.57)
			5	0.34	160 (4.15)	250 (6.57)	280 (7.61)	350 (9.33)	530 (14.2)	750 (20.0)
			8	0.55	170 (4.50)	350 (9.33)	430 (11.4)	450 (12.1)	540 (14.5)	
			20	1.4	350 (9.33)	490 (13.1)	590 (15.9)	610 (16.2)		
			35	2.4	520 (13.8)	530 (14.2)	620 (16.6)	650 (17.3)		
			75	5.2	650 (17.3)	660 (17.6)	940 (25.2)			
			150	10.3	1680 (44.9)	2060 (55.3)				
15 inches WC to 1.2 PSIG (37 to 83 mbar)	5-1/2 inches WC (14 mbar)	15 inches WC (37 mbar)	2	0.14	90 (2.42)	340 (8.98)	500 (13.5)	900 (24.2)	1100 (29.4)	1150 (30.8)
			6	0.41	250 (6.57)	540 (14.5)	930 (24.9)	1640 (43.9)	2100 (56.4)	
			10	0.69	340 (8.98)	800 (21.4)	1390 (37.0)	1940 (51.9)		
			30	2.1	680 (18.3)	1450 (38.7)	2390 (64.0)	2450 (65.7)		
			60	4.1	1160 (31.1)	2460 (66.0)	3480 (93.3)			
			150	10.3	2570 (68.8)	2710 (72.6)				
		1.2 PSIG (83 mbar)	2	0.14	90 (2.42)	260 (6.91)	410 (11.1)	600 (16.2)	810 (21.8)	700 (18.7)
			6	0.41	250 (6.57)	460 (12.4)	700 (18.7)	1290 (34.6)	1420 (38.0)	
			10	0.69	310 (8.31)	660 (17.6)	1020 (27.3)	1420 (38.0)		
			30	2.1	670 (18.0)	1109 (29.7)	2060 (55.3)	2430 (65.0)		
			60	4.1	1140 (30.4)	2180 (58.4)	3350 (89.9)			
			150	10.3	2480 (66.4)	2650 (70.9)				
1.2 to 2.5 PSIG (83 to 172 mbar)	0.2 PSIG (14 mbar)	1.2 PSIG (83 mbar)	2	0.14	120 (3.11)	170 (4.50)	220 (5.87)	350 (9.33)	490 (13.1)	520 (13.8)
			6	0.41	180 (4.85)	340 (8.98)	450 (12.1)	740 (19.7)	850 (22.8)	1070 (28.7)
			10	0.69	190 (5.20)	440 (11.8)	590 (15.9)	1010 (27.0)	1170 (31.5)	
			30	2.1	560 (14.9)	900 (24.2)	1550 (41.5)	1720 (46.0)		
			60	4.1	860 (23.2)	1110 (29.7)	2480 (66.4)	2340 (62.6)		
			150	10.3	1990 (53.3)	3480 (93.3)	3500 (93.8)			
		2.5 PSIG (172 mbar)	6	0.41	140 (3.81)	190 (5.20)	260 (6.91)	450 (12.1)	590 (15.9)	680 (18.3)
			10	0.69	170 (4.50)	340 (8.98)	490 (13.1)	570 (15.2)	860 (23.2)	
			30	2.1	430 (11.4)	660 (17.6)	980 (26.3)	1030 (27.7)		
			60	4.1	750 (20.0)	850 (22.8)	1940 (51.9)	2250 (60.2)		
			150	10.3	1480 (39.8)	2320 (62.2)	3350 (89.9)			
2.5 to 4.5 PSIG (172 to 310 mbar)	0.3 PSIG (21 mbar)	2.5 PSIG (172 mbar)	4	0.26	130 (3.46)	180 (4.85)	190 (5.20)	310 (8.31)	370 (10.0)	480 (12.8)
			8	0.55	140 (3.81)	280 (7.61)	360 (9.67)	520 (13.8)	710 (19.0)	800 (21.4)
			12	0.82	190 (5.20)	360 (9.67)	490 (13.1)	680 (18.3)	930 (24.9)	
			30	2.1	430 (11.4)	620 (16.6)	900 (24.2)	1110 (29.7)		
			60	4.1	660 (17.6)	1010 (27.0)	1730 (46.3)	1830 (49.1)		
			150	10.3	1570 (42.2)	2060 (55.3)	4620 (124)			
		4.5 PSIG (310 mbar)	8	0.55	120 (3.11)	190 (5.20)	250 (6.57)	400 (10.7)	520 (13.8)	540 (14.5)
			12	0.82	160 (4.15)	210 (5.52)	320 (8.66)	530 (14.2)	720 (19.3)	
			30	2.1	300 (7.96)	460 (12.4)	760 (20.4)	830 (22.1)		
			60	4.1	590 (15.9)	810 (21.8)	1230 (32.9)	1340 (36.0)		
			150	10.3	1230 (32.9)	1640 (43.9)	3610 (96.8)			
4.5 to 7 PSIG (310 to 483 mbar)	0.7 PSIG (48 mbar)	4.5 PSIG (310 mbar)	9	0.62	190 (5.20)	310 (8.31)	430 (11.4)	620 (16.6)	930 (24.9)	990 (26.6)
			12	0.83	210 (5.52)	400 (10.7)	560 (14.9)	810 (21.8)	1150 (30.8)	
			30	2.1	520 (13.8)	860 (23.2)	1100 (29.4)	1810 (48.4)		
			60	4.1	860 (23.2)	1520 (40.8)	2050 (55.0)	2710 (72.6)		
			150	10.3	1960 (52.6)	3480 (93.3)	5040 (135)			
		7 PSIG (483 mbar)	9	0.62	160 (4.15)	210 (5.52)	270 (7.26)	520 (13.8)	620 (16.6)	660 (17.6)
			12	0.83	190 (5.20)	310 (8.31)	370 (10.0)	650 (17.3)	860 (23.2)	
			30	2.1	370 (9.92)	700 (18.7)	900 (24.2)	1330 (35.6)		
			60	4.1	800 (21.4)	1290 (34.6)	1720 (46.0)	2450 (65.7)		
			150	10.3	1910 (51.2)	3350 (89.9)	4050 (109)			

- Shaded areas show where maximum operating inlet pressure for a given port diameter is exceeded.

Outlet Pressure Range	Offset from Setpoint	Outlet Pressure Setting	Inlet Pressure		NPT 1 Body Size					
					Orifice Size, Inches (mm)					
			PSIG	BAR	1/8 (3.2)	3/16 (4.8)	1/4 (6.4)	3/8 (9.5)	1/2 (12.7)	9/16 (14.3)
4 to 8 inches WC (10 to 20 mbar)	1 inch WC (2 mbar)	7 inches WC (17 mbar)	1	0.069	90 (2.42)	220 (5.87)	250 (6.57)	300 (7.96)	410 (11.1)	530 (14.2)
			5	0.34	220 (5.87)	430 (11.4)	450 (12.1)	1140 (30.4)	1900 (50.8)	1920 (51.5)
			8	0.55	230 (6.22)	490 (13.1)	530 (14.2)	2140 (57.4)	2360 (63.3)	
			20	1.4	520 (13.8)	970 (25.9)	1810 (48.4)	1170 (31.5) ¹		
			35	2.4	710 (19.0)	1480 (39.8)	2300 (61.5) ¹	930 (24.9) ¹		
			75	5.2	1030 (27.7)	1100 (29.4) ¹	1390 (37.3) ¹			
			150	10.3	1680 (44.9) ¹	1160 (31.1) ¹				
7 to 16 inches WC (17 to 40 mbar)	1 inch WC (2 mbar)	11 inches WC (27 mbar)	1	0.069	90 (2.42)	160 (4.15)	170 (4.50)	210 (5.52)	230 (6.22)	250 (6.57)
			5	0.34	160 (4.15)	300 (7.96)	310 (8.31)	520 (13.8)	620 (16.6)	1160 (31.1)
			8	0.55	170 (4.50)	360 (9.67)	430 (11.4)	1160 (31.1)	1460 (39.1)	
			20	1.4	350 (9.33)	580 (15.6)	780 (20.7)	1630 (43.6)		
			35	2.4	560 (14.9)	1030 (27.7)	2840 (37.5)	1190 (31.8) ¹		
			75	5.2	1230 (32.9)	1290 (34.6)	1510 (40.4) ¹			
			150	10.3	1740 (46.7)	1240 (33.2) ¹				
15 inches WC to 1.2 PSIG (37 to 83 mbar)	5-1/2 inches WC (14 mbar)	15 inches WC (37 mbar)	2	0.14	90 (2.42)	460 (12.3)	500 (13.4)	1100 (29.5)	1160 (31.1)	1330 (34.8)
			6	0.41	250 (6.70)	750 (20.1)	930 (24.9)	2500 (67.0)	2800 (75.0)	
			10	0.69	340 (9.11)	920 (24.7)	1590 (42.6)	3250 (87.1)		
			30	2.1	680 (18.2)	1560 (41.8)	2830 (75.8)	5460 (146)		
			60	4.1	1160 (31.1)	2550 (68.3)	4620 (124)			
			150	10.3	2570 (2.42)	2770 (74.2)				
		1.2 PSIG (83 mbar)	2	0.14	90 (2.42)	400 (10.7)	460 (12.3)	820 (22.0)	840 (22.5)	900 (24.1)
			6	0.41	250 (6.57)	630 (16.9)	700 (18.8)	1550 (41.5)	1610 (43.1)	
			10	0.69	320 (8.58)	860 (23.0)	1020 (27.3)	2320 (62.2)		
			30	2.1	670 (18.0)	1540 (41.3)	2550 (68.3)	4390 (118)		
			60	4.1	1140 (30.6)	2550 (68.3)	4190 (112)			
			150	10.3	2570 (68.9)	3100 (83.1)				
1.2 to 2.5 PSIG (83 to 172 mbar)	0.2 PSIG (14 mbar)	1.2 PSIG (83 mbar)	2	0.14	120 (3.11)	210 (5.52)	230 (6.22)	360 (9.65)	620 (16.6)	660 (17.6)
			6	0.41	180 (4.85)	340 (8.98)	450 (12.1)	750 (20.1)	8810 (23.5)	1080 (29.1)
			10	0.69	190 (5.20)	560 (14.9)	650 (17.3)	1150 (30.8)	1750 (47.0)	
			30	2.1	630 (16.9)	1230 (32.9)	1600 (42.9)	1910 (51.2)		
			60	4.1	1010 (27.0)	2450 (65.7)	3600 (96.5)	2420 (64.9)		
			150	10.3	2440 (65.3)	3480 (93.3)	3870 (104)			
		2.5 PSIG (172 mbar)	6	0.41	140 (3.81)	260 (6.91)	270 (7.26)	500 (13.4)	670 (18.0)	680 (18.3)
			10	0.69	180 (4.85)	450 (12.1)	490 (13.1)	710 (19.0)	860 (23.2)	
			30	2.1	570 (15.2)	720 (19.3)	1030 (27.7)	1640 (44.0)		
			60	4.1	850 (22.8)	1830 (49.1)	2520 (67.4)	3130 (83.9)		
			150	10.3	2190 (58.8)	3350 (89.9)	3480 (93.3)			
2.5 to 4.5 PSIG (172 to 310 mbar)	0.3 PSIG (21 mbar)	2.5 PSIG (172 mbar)	4	0.26	140 (3.81)	180 (4.85)	190 (5.20)	410 (11.1)	430 (11.4)	480 (12.8)
			8	0.55	180 (4.85)	320 (8.66)	360 (9.67)	710 (19.0)	740 (19.7)	900 (24.2)
			12	0.82	190 (5.20)	400 (10.7)	490 (13.1)	930 (24.9)	960 (25.6)	
			30	2.1	430 (11.4)	620 (16.6)	900 (24.2)	1830 (49.1)		
			60	4.1	660 (17.6)	1610 (43.2)	1740 (46.7)	2970 (79.6)		
			150	10.3	2010 (53.9)	4090 (110)	6660 (178)			
		4.5 PSIG (310 mbar)	8	0.55	120 (3.11)	190 (5.20)	250 (6.57)	490 (13.1)	520 (13.8)	540 (14.5)
			12	0.82	160 (4.15)	210 (5.52)	320 (8.66)	610 (16.2)	850 (22.8)	
			30	2.1	390 (10.4)	520 (13.8)	760 (20.4)	1360 (36.3)		
			60	4.1	630 (16.9)	840 (22.5)	1230 (32.9)	2580 (69.1)		
			150	10.3	1390 (37.3)	2880 (77.1)	4990 (134)			
4.5 to 7 PSIG (310 to 483 mbar)	0.7 PSIG (48 mbar)	4.5 PSIG (310 mbar)	9	0.62	210 (5.52)	310 (8.31)	430 (11.4)	770 (20.6)	970 (25.9)	1050 (28.0)
			12	0.83	230 (6.22)	400 (10.7)	560 (14.9)	1010 (27.0)	1290 (34.6)	
			30	2.1	520 (13.8)	860 (23.2)	1100 (29.4)	2080 (55.7)		
			60	4.1	880 (23.5)	1520 (40.8)	2050 (55.0)	3650 (97.8)		
			150	10.3	2060 (55.3)	3510 (94.0)	6000 (161)			
		7 PSIG (483 mbar)	9	0.62	160 (4.15)	210 (5.52)	270 (7.26)	590 (15.9)	620 (16.6)	660 (17.6)
			12	0.83	210 (5.52)	310 (8.31)	370 (10.0)	770 (20.7)	890 (23.6)	
			30	2.1	370 (10.0)	700 (18.7)	900 (24.2)	1650 (44.2)		
			60	4.1	800 (21.4)	1290 (34.6)	1720 (46.0)	2760 (74.0)		
			150	10.3	2010 (53.9)	3390 (90.9)	4140 (111)			


1. Limited due to boost

- Shaded areas show where maximum operating inlet pressure for a given port diameter is exceeded.

P600 Parts List


Item	Description	Qty.	Part Number
1	3/4" Iron	1	664-318-000
	1" NPT - Iron		664-318-001
2	Body Bolts - Plated Steel	2	648-466-006
3	Bonnet - Iron	1	604-559-000
4	Lower Casing - Iron	1	629-232-000
5	Orifices	1	
	1/8" Aluminum		688-013-004
	3/16" Aluminum		688-013-003
	1/4" Aluminum		688-013-002
	3/8" Aluminum		688-013-001
	1/2" Aluminum		688-013-000
	9/16" Aluminum		688-018-001
6	Range Springs	1	
	4" - 8" WC - Red, Plated Steel		655-732-000
	7" - 16" WC - Olive Drab, Plated Steel		655-732-001
	15" WC - 1.2 PSIG - Yellow, Plated Steel		655-732-002
	1.2 PSIG - 2.5 PSIG - Light Green, Plated Steel		655-732-003
	2.5 PSIG - 4.5 PSIG - Light Blue, Plated Steel		655-732-004
7	Diaphragm Heads	1	
	Diaphragm Head - O & M Versions - Stainless Steel		628-281-000
	Diaphragm Head - R Version Only - Plated Steel		628-281-001
8	Pusher Post	1	
	Pusher Post - O & M Versions - Aluminum		637-329-000
	Pusher Post - R Version - Zamak		637-329-001
9	Diaphragms	1	
	Diaphragm - Nitrile - O & M Versions		618-095-000
	Diaphragm - Nitrile - R Version Only		618-095-001
10	Body O-ring - Nitrile	1	649-309-001
11	Insert O-Ring - Nitrile	1	649-309-002
12	Seat Assembly - Nitrile	1	822-023-002
13	Seat Stem - Anodized Aluminum	1	689-008-000
14	Cotter Pin (Not Shown) - Stainless Steel	1	635-000-004
15	Lever Assembly - Plated Steel	1	827-014-000
16	Lever Screw - Plated Steel	2	648-000-383
17	Seat Assembly Guide Insert - Aluminum	1	626-108-000
18	Bonnet Cap - Plastic	1	610-056-000
19	Build Screw Nuts - Plated Steel	8	634-000-038
20	Build Screws - Plated Steel	8	648-000-030
21	Vent Assembly - Spring Case Up (Standard) - Plastic	1	836-009-000
	Vent Assembly - Spring Case Down - Plastic	1	836-008-000
23	Seat Stem O-ring - M Version Only - Nitrile	1	649-000-001
24	Throat Seal O-ring - M Version Only - Nitrile	1	649-000-193
25	Pilot Tube Assembly - O & R Versions - Stainless Steel	1	818-006-000
26	Insert Screws	4	
	O & R Version - Stainless Steel		648-000-383
	M Version - Plated Steel	1	648-000-389
27	Adjustment Screw - Zinc	1	648-499-000
28	Lower spring Washer - O & M Versions - Plated Steel	1	662-236-001
29	Spring Holder - R Version Only - Plated Steel	1	648-537-000
30	Diaphragm Cap Screw - O & M Versions - Plated Steel	1	648-466-007
31	Relief Valve Spring - R Version Only - Stainless Steel	1	655-732-006
32	Back-up Ring - Stainless Steel	1	662-236-000
33	Lower Spring Seat - O & M Versions - Plated Steel	1	643-197-001
34	Cap Gasket - Neoprene	1	624-069-000

P600 R

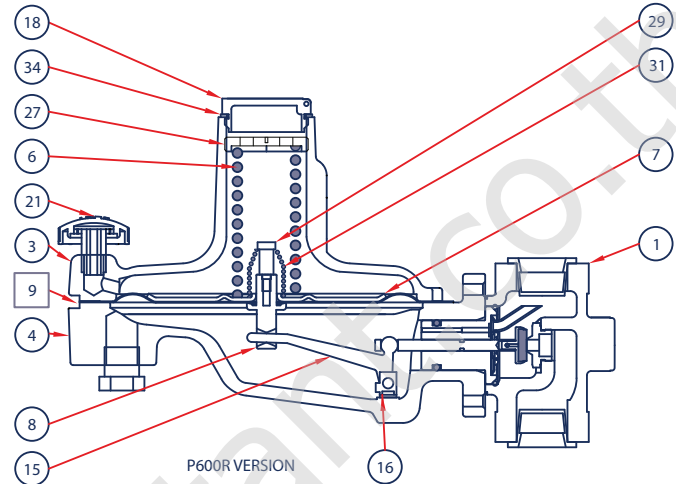


Parts included in P600 R Repair Kit, 971-600-001

P600 M

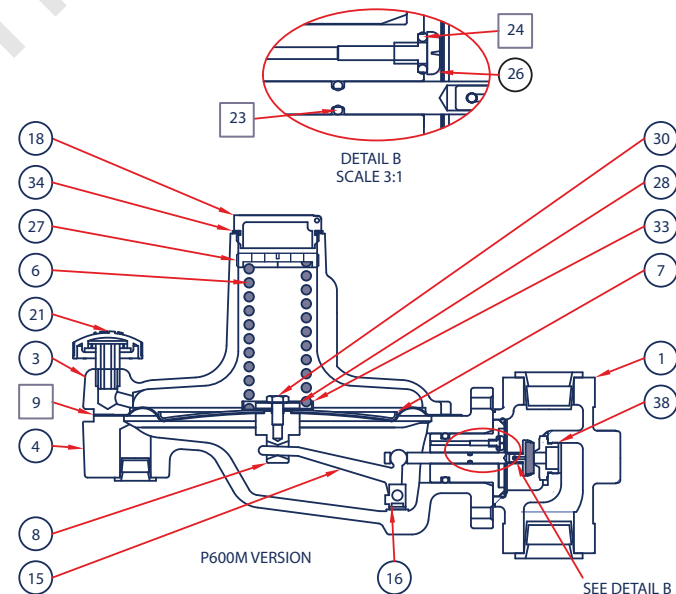

Parts included in P600 O and M Repair Kit, 971-600-000

P600

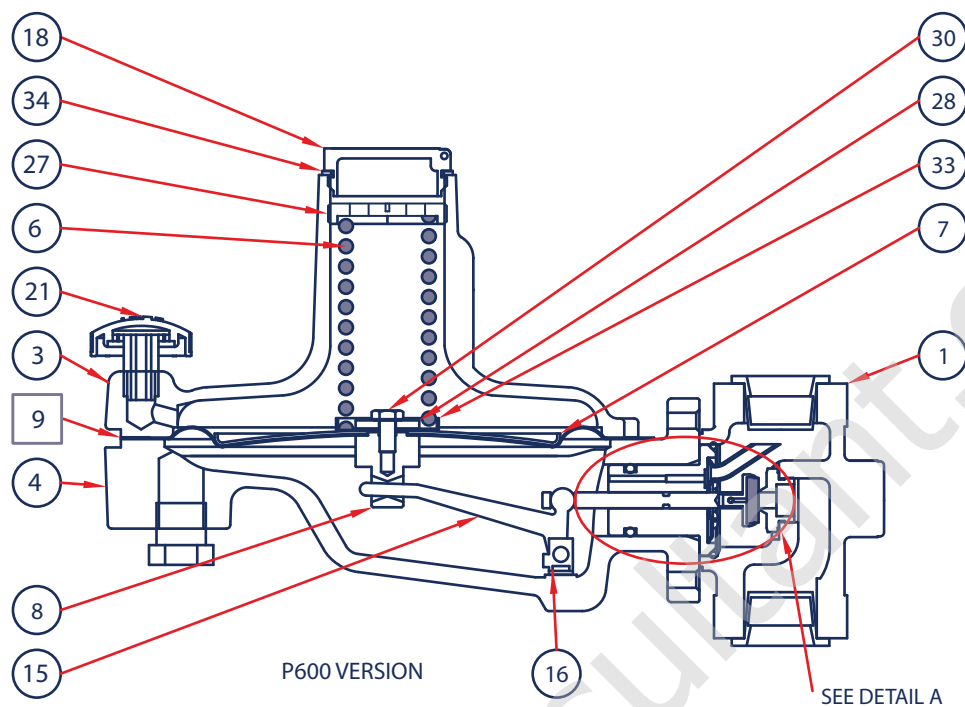

☐ Parts included in P600 O and M Repair Kit, 971-600-000

