

Delta Port™ Relief Valve Manifolds

8530/AA8530 Series

Application

Designed especially for use as a primary relief device on large stationary pressurized storage containers, the base is supplied with a two-inch NPT threaded container connection. These manifolds incorporate an additional relief valve, not included in the flow rating, allowing for servicing or replacement of any one of the relief valves without evacuating the container. The hand-wheel on the manifold selectively closes off the entrance port to the relief valve being removed while the remaining relief valves provide protection for the container and its contents. All manifold flow ratings are based on flow through the relief valves after one has been removed for service or replacement.

Materials

Body Ductile Iron
Resilient Parts Teflon
Clapper Disc Stainless Steel
Bleeder Valve Stainless Steel



Relief Valve Materials

Body (3135) Brass
Spring Guide (3135) Brass
Body (AA3135) Aluminum
Spring Guide (AA3135) Aluminum
Spring (3135 & AA3135) Stainless Steel
Seat Disc (3135 & AA3135) Resilient Synthetic Rubber

CE 0036



8533AG

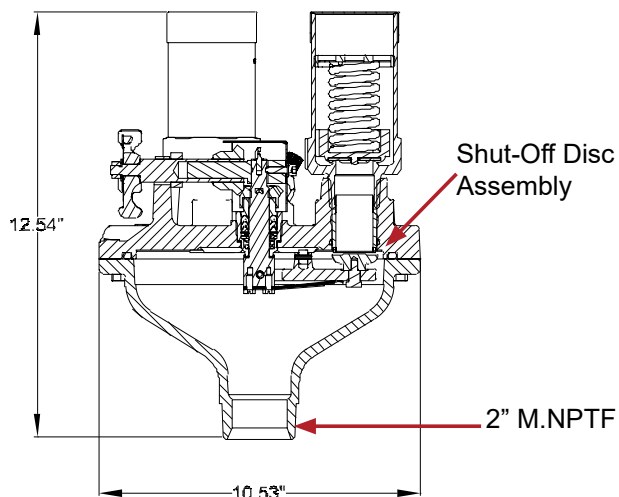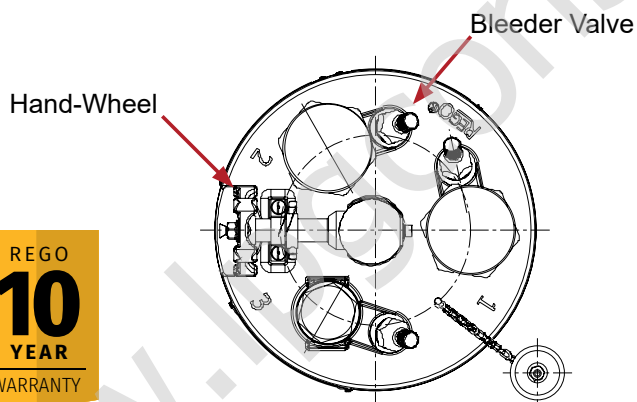

Ordering Information

Part Number	Start to Discharge Setting PSIG	Application		Container Connection M.NPTF	Relief Valve				ASME Flow Rating SCFM (air) @ 120% of Set Pressure *
		LPG	NH3		Qty.	Part Number	Inlet Connection M.NPT	Accessories	
								Pipe-away Adapter**	
8532AG	250	Yes	No	2"	2	3135MG	1¼"	3135-10	5,345 (1)
8533AG					3				10,690 (2)
AA8532MA250		No	Yes		2	AA3135MA250		AA3135-10	6,058 (1)
AA8533MA250					3				12,116 (2)
AA8532MA265	265			2	AA3135MA265	6,404 (1)			
AA8533MA265				3		12,808 (1)			

* Flow rating based on number of relief valves indicated in parentheses ().

Flow rates shown are for bare relief valves. Adapters and pipe-always will reduce flow rates as discussed in forwarding information in L-500 catalog. ** 2" F. NPT outlet connection