




AC Type Gas Leakage Detector

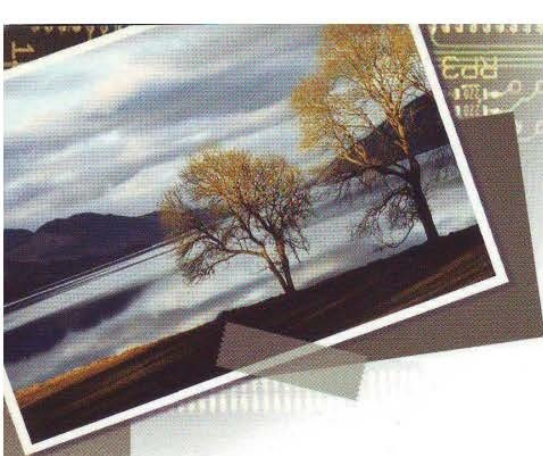

VTD2005

Type	Single Circuit, Immediate Alarm Type, Combustible Catalytic Sensor Type, Exposed Type
Detectable Gas	Natural Gas, LP Propane, Butane
Measuring range	0~ 100% LEL
Alarm Setting	20% LEL
Response time	within 20 Seconds of Detection
Operating Temperature	-20°C to 40°C RH95% Under
Power Consumption	1.5W, Normal
Voltage	DC8V ~ DC15V
Visual Alarm	Yellow Lamp & Buzzer
Alarm Signal	Normal: DC2V , Alarm: DC10V
Audible Alarm	75 dB at 1m
Dimensions(mm)	70(W)X100(H)X38(D)
Weight	224g



Vital Technology

LPG CONSULTANT CO., LTD.

TEL : +66 2 964 6372-4

FAX : +66 2 964 5354

www.lpgconsultant.co.th