

# 自动切换分离式调压器

## Separate Type Automatic Change-Over Regulator

此类调压器是一体型自动切换调压器中,自动切换的一次减压部分分离出来的调压器。出口压力为0.032-0.083MPa。

This regulator is the primary side automatic change-over section separated from the integrated type automatic change-over regulator. Therefore, the outlet pressure is between 0.032 and 0.083 MPa.


AX-30A-0



AX-50-0



AXF-70-0

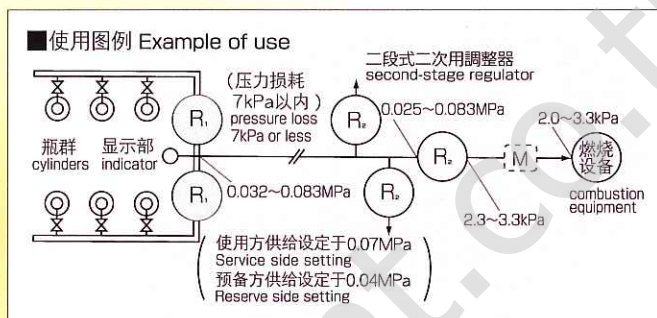

## 可调型自动切换式调压器



AX-10AH1



AX-30AM

## 自动切换分离式调压器规格 Specifications for Separate Type Automatic Change-Over Regulator

| 型 号<br>Model | 流量范围(C <sub>3</sub> H <sub>8</sub> )<br>Flow rate range ※<br>标准 ~ 最大<br>Standard Maximum | 进口压力(MPa)<br>Inlet pressure | 出口压力 (kPa)<br>Outlet pressure | 进口连接<br>Inlet connection        | 出口连接<br>Outlet connection       | 尺寸(宽×高mm)<br>Spacing (W×L) | 重量(kg)<br>Mass |
|--------------|------------------------------------------------------------------------------------------|-----------------------------|-------------------------------|---------------------------------|---------------------------------|----------------------------|----------------|
| AX-30A-0     | 30~40kg/h                                                                                | 0.1~1.56                    | 0.032~0.083                   | JIS20K15A法兰<br>JIS20K15A flange | Rc1/2                           | 250×60                     | 2.8            |
| AX-50-0      | 50~70kg/h                                                                                |                             |                               | JIS20K20A法兰<br>JIS20K20A flange | R1                              | 330×160                    | 7.7            |
| AXF-70-0     | 70~100kg/h                                                                               |                             |                               | JIS20K20A法兰<br>JIS20K20A flange | JIS10K25A法兰<br>JIS10K20A flange | 750×120                    | 23.4           |
| AXF-100-0    | 100~150kg/h                                                                              |                             |                               | JIS20K25A法兰<br>JIS20K25A flange | JIS10K25A法兰<br>JIS10K15A flange | 950×150                    | 40.0           |
| AXF-200-0    | 200~300kg/h                                                                              |                             |                               | JIS20K25A法兰<br>JIS20K25A flange | JIS10K40A法兰<br>JIS10K40A flange | 950×150                    | 42.9           |
| AXF-300-0    | 300~450kg/h                                                                              |                             |                               | JIS20K40A法兰<br>JIS20K40A flange | JIS10K50A法兰<br>JIS10K50A flange | 1200×150                   | 104            |
| AXF-400-0    | 400~600kg/h                                                                              |                             |                               | JIS20K50A法兰<br>JIS20K50A flange | JIS10K50A法兰<br>JIS10K50A flange | 1200×150                   | 107            |
| AXF-500-0    | 500~750kg/h                                                                              |                             |                               | JIS20K50A法兰<br>JIS20K50A flange | JIS10K50A法兰<br>JIS10K50A flange | 1200×150                   | 107            |

※ 入口压力需0.2MPa以上。(LPG)  
The inlet pressure will be needed at least 0.2Mpa.

(使用方供给设定于0.07MPa · 预备方供给设定于0.04MPa)  
(Service side setting 0.07MPa · Reserve side setting 0.04MPa)

## 可调型自动切换式调压器规格 Specifications for Automatic Change-Over Type Medium-Pressure Regulator

| 型 号<br>Model | 流量范围(C <sub>3</sub> H <sub>8</sub> )<br>Flow rate range ※<br>标准 ~ 最大<br>Standard Maximum | 进口压力(MPa)<br>Inlet pressure | 出口压力 (kPa)<br>Outlet pressure | 进口连接<br>Inlet connection | 出口连接<br>Outlet connection | 尺寸(宽×高mm)<br>Spacing (W×L) | 重量(kg)<br>Mass |
|--------------|------------------------------------------------------------------------------------------|-----------------------------|-------------------------------|--------------------------|---------------------------|----------------------------|----------------|
| AX-10AH1     | 10~15kg/h                                                                                | 0.1~1.56                    | 3.5~5.5kPa                    | Rc1/2                    | R <sup>3</sup> /4 油拧(阳)   | 150×160                    | 2.2            |
| AX-10AH2     | 10~15kg/h                                                                                |                             | 5.5~10.0kPa                   |                          |                           |                            |                |
| AX-10M       | 10~15kg/h                                                                                | 0.2~1.56                    | 0.01~0.09MPa                  | JIS20K15A 法兰             | Rc1/2 油拧                  | 150×194                    | 1.7            |
| AX-30AM      | 30~35kg/h                                                                                |                             | 0.02~0.1MPa                   |                          |                           | 250×202                    | 5.5            |

※ 含带发信功能的型号。(LPG)  
Regulator with signal transmitting function type is also available.